

Chemelean®

Economy Liquid Filters for Flow Rates up to 200 gpm

The **Chemelean** vessel and cartridge line offers versatility to adapt to a wide variety of process liquid applications up to 200 gpm. The vessel comes in two sizes to hold either a 20" length cartridge or 40" length cartridge. Chemelean cartridges come in a wide range of media choices for suitable fluid compatibility.



Series 55C
with Legs

Stock units are available in 8" diameter at 150# ANSI rating.

2" NPT standard connections with option for changing to 2" flange connections.

Dual rated: 275 psig at 250°F without corrosion allowance and 150 psig at 250°F with 1/8" corrosion allowance.


Typical Fluids Filtered:

- Amine
- Condensate
- Final Products
- Glycol
- Hydrocarbons
- Lube Oil
- Water



Series 55C
with Saddles

Long Life **AL**tern Ative to **BA**g VesseLs! Contaminant Loading Comparison

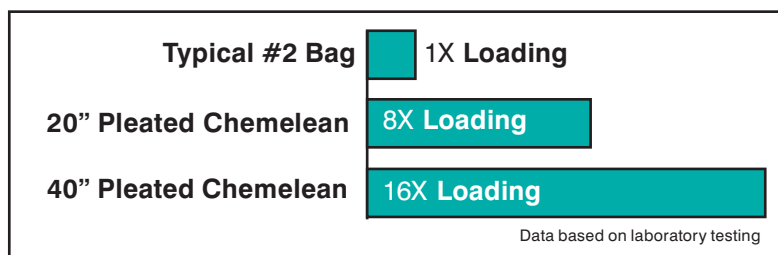


Tired of changing out bag filters so often? Before you buy your next bag filter vessel, consider purchasing a Chemelean filter vessel instead!

Chemelean filters provide excellent contaminant loading so cartridge change-out typically becomes less frequent than a bag...and that keeps your process up and running!

Cartridge Series CM

Available in pleated polypropylene, polyester, glass or cellulose and PEACH® polyester or polypropylene.

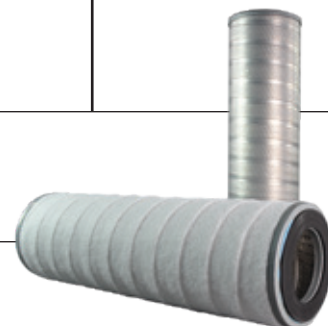

WARNING: This product can expose you to chemicals including 1,3-Butadiene, Carbon Black, Formaldehyde, Nickel (Metallic), or Glass Wool which are known to the State of California to cause cancer, or Bisphenol A (BPA) which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.